


D



CON6PT4005G2.5SXXX

Please refer to BS 7671, current rev for installation guidance

Name:	Armoured Evo Connection
Type:	CON6PT4005G2.5SXXX
Description:	Armoured Evo Connection Lead for Lighting circuits, 5 core x 2.5mm ² LSZH cable. Wiring standard 6PT.
Dimensions:	

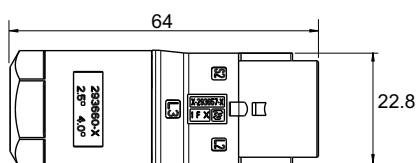

TECHNICAL SPECIFICATION

Material - Connector:	PA66 + 25%GF UL-94 V0 (S/N 704872-1) PA66 unfilled UL-94 V2 (S/N 1573372-1)
Cable type:	BASEC Approved 6491B (-R450/700V)
Cable insulation:	LSZH (certified to BS 7211)
Fire requirements:	BS EN 50575:2014+A1:2016
Cable colour:	Brown, Blue Green/Yellow, White, Orange in Metal Conduit
Minimum operating temperature:	-20°C
Maximum operating temperature:	+70°C
Enclosure class:	IP40 when engaged
Rated current (A):	20A
Power outputs (A):	5 Pole
Rated voltage (V):	240V
Frequency (Hz):	50Hz
Wire size (mm²):	2.5mm
Connector coupler standard:	IEC 61535:2009+A1:2013
QMS:	ISO 9001:2016
Wiring and test standard:	BS 8488:2009+A1:2010