

A


MDB.0252.N.4.XXXX



Please refer to BS 7671, current rev for installation guidance

Name: Evo Extender Lead
Type: MDB.0252.N.4.XXXX
Description: Master distribution box, 9 Port Evo Non-Pluggable c/w MC38 28C 9 x 4mm² L, N, E + 1 x 4mm² CPC + 3 x 1.5mm² 6491B Orange. + 3 x 15mm² White (Dali Pairs), Home Run Wiring standard 6PT.

Dimensions:

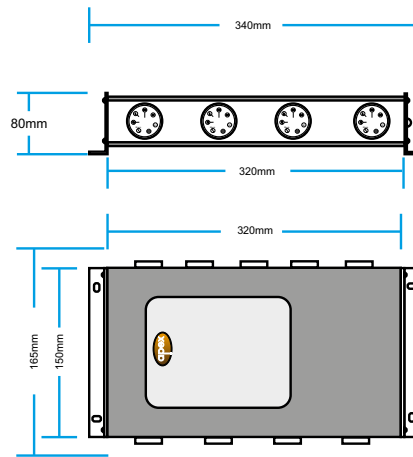

TECHNICAL SPECIFICATION

Material - Enclosure: Aluminium
Home Run: Steel
Colour: Silver
Minimum operating temperature: -20°C
Maximum operating temperature: +70°C
Rated current (A) - Single Phase: 20A (max)
Power outputs (A): 5 Pole (9 ports)
Rated voltage (V): 240V
Frequency (Hz): 50Hz
Wire size (mm²): 4mm
Connector coupler standard: IEC 61535:2009+A1:2013
QMS: ISO 9001:2016
Wiring and test standard: BS 8488:2009+A1:2010