

A


MDB.0248.N.4.XXXX



Please refer to BS 7671, current rev for installation guidance

Name: Un-Switch Fused Connection Unit
Type: MDB.0248.N.4.XXXX
Description: Master distribution box, 9 Port Evo Non-Pluggable c/w MC38 28C 9 x 4mm² L, N, E + 1 x 4mm² CPC Home Run. Wiring standard 4P3. Male Harting 5.4.31.

Dimensions:

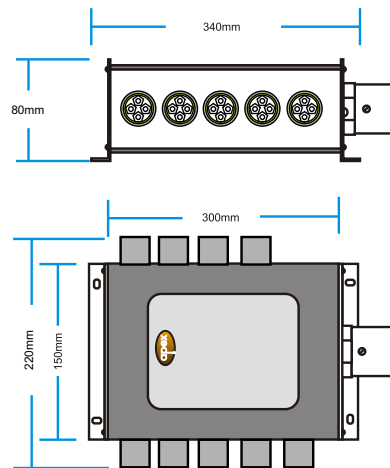

TECHNICAL SPECIFICATION

Material - Enclosure: Aluminium
Home Run: Aluminium
Colour: Silver/Grey
Minimum operating temperature: -20°C
Maximum operating temperature: +70°C
Enclosure class: IP40 when connected or ports capped off using 293257-1
Rated current (A): 25A (max)
Power outputs (A): 3 Pole
Rated voltage (V): 240V
Frequency (Hz): 50Hz
Wire size (mm²): 4mm
Connector coupler standard: IEC 61535:2009+A1:2013
QMS: ISO 9001:2016
Wiring and test standard: BS 8488:2009+A1:2010