


H

# CON6PS0008471XXXX

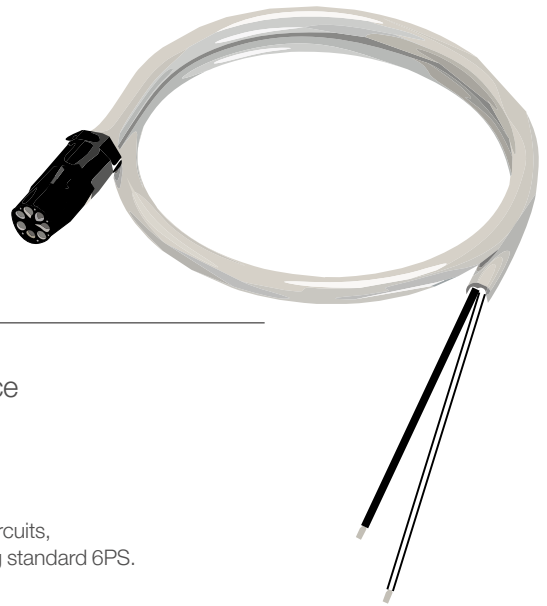

Please refer to BS 7671, current rev for installation guidance

**Name:** Evo Connection Lead  
**Type:** CON6PS0008471XXXX  
**Description:** Evo Connection Lead for Lighting circuits,  
2 core x 1.5mm<sup>2</sup> LS0H cable. Wiring standard 6PS.

## TECHNICAL SPECIFICATION

**Material - Connector:** PA66 + 25%GF UL-94 V0 (S/N 704872-1)  
PA66 unfilled UL-94 V2 (S/N 1573372-1)

**Cable type:** Belden 8471 Equivalent

**Cable insulation:** LS0H

**Fire requirements:** BS EN 50575:2014+A1:2016

**Cable colour:** Grey

**Minimum operating temperature:** -20°C

**Maximum operating temperature:** +70°C

**Enclosure class:** IP40 when engaged

**Rated current (A):** 16A

**Power outputs (A):** 2 Pole

**Rated voltage (V):** 240V

**Frequency (Hz):** 50Hz

**Wire size (mm<sup>2</sup>):** 1.5mm

**Connector coupler standard:** IEC 61535:2009+A1:2013

**QMS:** ISO 9001:2016

**Wiring and test standard:** BS 8488:2009+A1:2010